

Product Specification

Status

BIFOLD

Our most popular aluminium bifolds, the Status range offers a selection of configurable options with a low threshold and slim sightlines for the maximum amount of light. Like all Vufold products, they're beautifully engineered and come ready-glazed, complete with all the drill bits and fixings you need for super-smooth easy installation.



(Detailed product diagrams overleaf)

Product Overview

Status

BIFOLD

Max Individual Door Size 1.2m


Max Individual Door Height 2.7m

Max Individual Door Weight 125Kg


Tested to PAS24:2012 Enhanced Security, BS6375 Part 1 Weather, BS6375 Part 2 Operation & Strength, BS6375 Part 3 Annex A.

Other Cill options available - contact us for further details.


STANDARD CILL

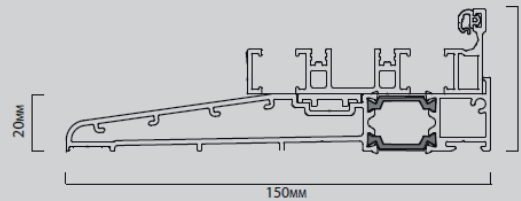

FRAME JAMBS L/R



FRAME HEAD

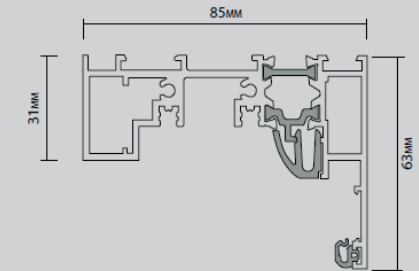

TECH SPEC	DOUBLE GLAZED	TRIPLE GLAZED
Frame depth	85mm	85mm
Typical sightline	123mm	123mm
Profile	Square	Square
Maximum panel width	1.2m	1.2m
Maximum panel height	2.7m	2.7m
Part L	Yes	Yes
U Value	1.4 W/m ² K	1.1 W/m ² K
Air permeability	Class 3 600Pa	Class 3 600Pa
Resistance to wind load	Class B3 1200Pa	Class B3 1200Pa
Water tightness	Class 4A 150Pa	Class 4A 150Pa



For more information:

01625 44 28 99 | sales@vufold.co.uk | vufold.co.uk

VUFOLD[®]

The difference is in the detail